

For developers and architects who prioritize long-term considerations, the ACO ShowerDrain offers a prudent luxury choice with a strong emphasis on reliability. Every aspect of this product can be trusted, from its smooth passivated surfaces that ensure secure drainage and hygiene in bathrooms, to its seals, joints, and material thickness that guarantee minimal noise emissions.

The ShowerDrain is a shower floor channel that seamlessly blends form and function. It serves as an ideal solution for high-end bathrooms featuring elegant glass fixtures and natural stone floors.

It is also well-suited for public applications where the absence of barriers is of utmost importance. The channel body, made of durable stainless steel, has a lateral gradient that ensures effective water drainage.

ACO ShowerDrain is a high-quality choice that offers a reliable, aesthetically pleasing, and functional solution for a range of applications. Its focus on detail, from its luxurious design to its practical features, makes it a trusted option for those looking to create long-lasting and visually appealing bathroom spaces.










Standard Grating Designs

ACO India's shower channel gratings are meticulously engineered to provide efficient water management in shower areas, offering a reliable solution for capturing and draining water effectively. These gratings are specifically designed to prevent any accumulation of water and potential water damage, ensuring a safe and hassle-free bathing experience.

The grating designs are carefully crafted to facilitate the smooth flow of water into the channels, minimizing the risk of blockages or obstructions. This enables the water to be swiftly directed towards the drain, preventing any pooling on the bathroom floor and reducing the chances of slips and falls.


ACO India's shower channel gratings combine functionality, durability, and ease of maintenance to offer a comprehensive solution for effective water capture and drainage. By preventing water accumulation and potential damage, these gratings contribute to a safer and more hygienic showering environment.



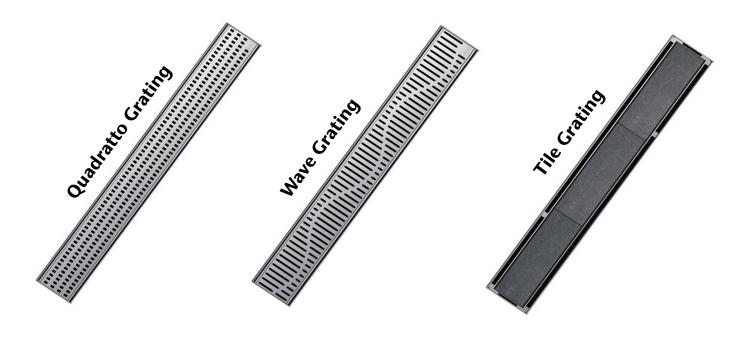

ACO ShowerDrain C


- Material: Stainless steel material grade 316
- Load class: Meets K3 requirements
- Visible channel width: 80 mm
- Pickle Passivated Surface, Suitable for Bare foot area
- Grating Varients: Quadratto, Wave, Tileable (10mm tile)
- Depth 21mm
- Outlet type: Vertical, DN50 at the center
- Customizable lengths upto 2400mm
- Flowrate: 1.0l/s

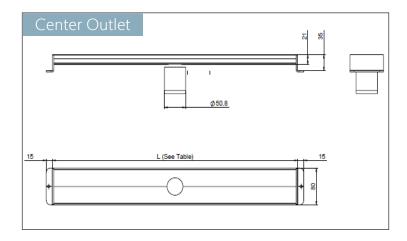

| | Grating Design | Dimension [mm] | Article No |
|--|---|----------------|------------|
| | | 585 | 155241 |
| | | 685 | 155242 |
| | | 785 | 155243 |
| | Quadratto | 885 | 155244 |
| | | 985 | 155245 |
| | | 1085 | 155246 |
| (::::::::::::::::::::::::::::::::::::: | 1185 | 155247 | |
| | | 585 | 155223 |
| | | | 155224 |
| | | | 155225 |
| | Wave | 885 | 155226 |
| | 985 1085 1185 585 685 785 Wave 885 985 1085 Tile 885 985 1085 | 985 | 155227 |
| | | 1085 | 155228 |
| | | 1185 | 155229 |
| Tile | Tile | 585 | 155232 |
| | | | 155233 |
| | | | 155234 |
| | | | 155235 |
| | | | 155236 |
| | | | 155237 |
| | | 1185 | 155238 |

ACO ShowerDrain C


- Material: Stainless steel material grade 316
- Load class: Meets K3 requirements
- Visible channel width: 80 mm
- Pickle Passivated Surface, Suitable for Bare foot area
- Grating Varients: Quadratto, Wave, Tileable (10mm tile)
- Depth 21mm
- Outlet type: Vertical, DN50 at the End
- Customizable lengths upto 2400mm
- Flowrate: 1.0l/s

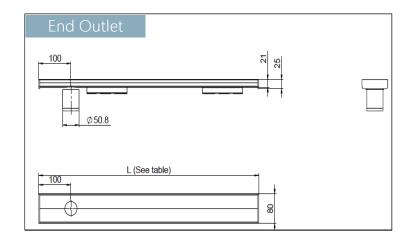

| | Grating Design | Dimension [mm] | Article No |
|--|---|----------------|------------|
| | | 585 | 155268 |
| | | 685 | 155269 |
| | | 785 | 155270 |
| | Quadratto | 885 | 155271 |
| | | 985 | 155272 |
| | 985 108 118 585 685 785 Wave 885 985 | 1085 | 155273 |
| | | 1185 | 155274 |
| | | 585 | 155250 |
| | | | 155251 |
| | | | 155252 |
| | Wave | | 155253 |
| | | 985 | 155254 |
| | | 1085 | 155255 |
| | | 1185 | 155256 |
| | Tile | 585 | 155259 |
| | | 685 | 155260 |
| | | 785 | 155261 |
| | | 885 | 155262 |
| | | 985 | 155263 |
| | | 1085 | 155264 |
| | | 1185 | 155265 |
| | | | |

ACO ShowerDrain M+

- Material: Stainless steel material grade 316
- Load class: Meets K3 requirements
- Pickle passivated Surface, Suitable for Bare foot area
- Grating Variants: Quadratto, Wave, Tile able (10mm tile)
- Depth: Channel 21mm + gully body
- Outlet type: Vertical / horizontal, DN40/50 at the center
- With water seal of 50mm
- Customizable lengths up to 2400mm
- Flowrate: 0.4 0.5L/S

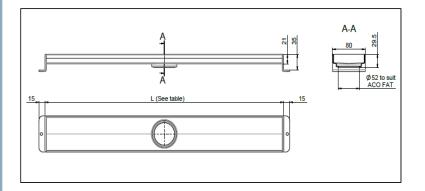

| | Grating Design | Dimension [mm] | Article No |
|--|----------------|----------------|------------|
| | Quadratto | 585 | 155282 |
| | | 685 | 155283 |
| | | 785 | 155284 |
| | | 885 | 155285 |
| | | 985 | 155286 |
| | | 1085 | 155287 |
| | | 1185 | 155288 |
| | | 585 | 155275 |
| | | 685 | 155276 |
| | Wave | 785 | 155277 |
| | | 885 | 155278 |
| | | 985 | 155279 |
| | | 1085 | 155280 |
| | | 1185 | 155281 |
| | Tile | 585 | 155289 |
| | | 685 | 155290 |
| | | 785 | 155291 |
| | | 885 | 155292 |
| | | 985 | 155293 |
| | | 1085 | 155294 |
| | | 1185 | 155295 |

Gully (Foul Air Trap)



The ACO ShowerDrain M+ can be combined with two different gully bodies to make it suitable for the installation situation. The gully body of the ACO ShowerDrain M+ can be flexibly aligned according to the course of the drainage pipe. Screwed in the middle, the gully body is therefore a secure, force-locked connection that holds the gully securely in position after installation.




During installation and beyond the period of usage, a permanently tight connection of all components is very important. Therefore, all gully bodies are equipped with a permanently injected seal. This ensures that the seal is not accidentally lost or can slip during installation.

| Product | Water Trap | Outlet Size | Flowrate | Article No |
|---------|------------|-------------|-------------------------------------|------------|
| | 30mm | 40/50 mm | 0,5 l/s (with 20 mm water built-up) | 9010.81.21 |
| | 25mm | 40 mm | 0,5 l/s (with 20 mm water built-up) | 9010.81.22 |

ACO Gully Top

- Top sections with square gratings
- Material: Stainless Steel 316.
- Loosely inserted square grating
- Load Class: K3 (300Kg)
- Height Adjustable
- Pickled and passivated for corrosion resistance
- Grating with NBR support to avoid rattling noise and have firm connectivity with gully body.
- Space to accommodate 10mm tile

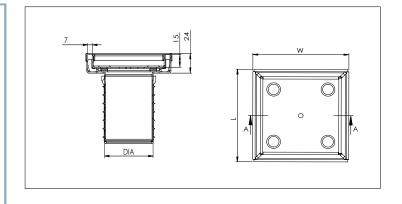

| Water Trap | Outlet Size (mm) | Article No |
|---------------------------|---------------------|-----------------|
| ACO Gully with Tile Grate | W100 x L100, Dia 70 | 155016 + 155017 |
| ACO Gully with Tile Grate | W125 x L125, Dia 70 | 155019 + 155020 |
| ACO Gully with Tile Grate | W150 x L150, Dia 90 | 155023 + 155024 |



ACO. we care for water

Intelligent drainage systems from ACO ensure the proper diversion or storage of rainwater and wastewater. With innovative separation and filtration technology, we prevent water contamination. We embrace the challenge of water reuse to secure a resource-efficient cycle.

ACO Systems and Solutions Pvt Ltd

Plot no: 113 & 114, Survey no: 89, 90 & 93, Peenya III Phase Industrial Area, Bangalore - 560058 Tel. 080 2372 5487

acoindia@acosystems.in

www.aco.com

Find your personal contact person:

https://www.aco.in/contact/sales-find-your-local-representative

