

ACO grease capture

Product information for the product group

ACO Product benefits

- Automatic fats, oils and grease removal into waste container
- Simple to install
- Protect inner building pipes from fats, oils and grease blockages
- Very easy to maintain
- Hygienic - made from Stainless Steel
- Overflow protection
- Separation process improvement by addition of food debris removal basket


- Compact one-piece construction made from stainless steel
- Inbuilt flow reducer
- Movable inlet and outlet
- Canister or gastro container



Item Technical Data 418502.22.23.C2

Model name	Flow rate	Contents		Weight		Voltage	Plug type	Power supply	Inlet & outlet connection type
		Silt basket	Grease collection box	Empty	Full				
	[l/s]	[l]	[l]	[kg]	[kg]				
GC220	2.2	8.8	3.8	47	150	230V/50Hz	CEE7/7	1000W, 4.3A	Flexible coupling (in D50, out D75) <br / > coupling 2" and 3"

Dimensions

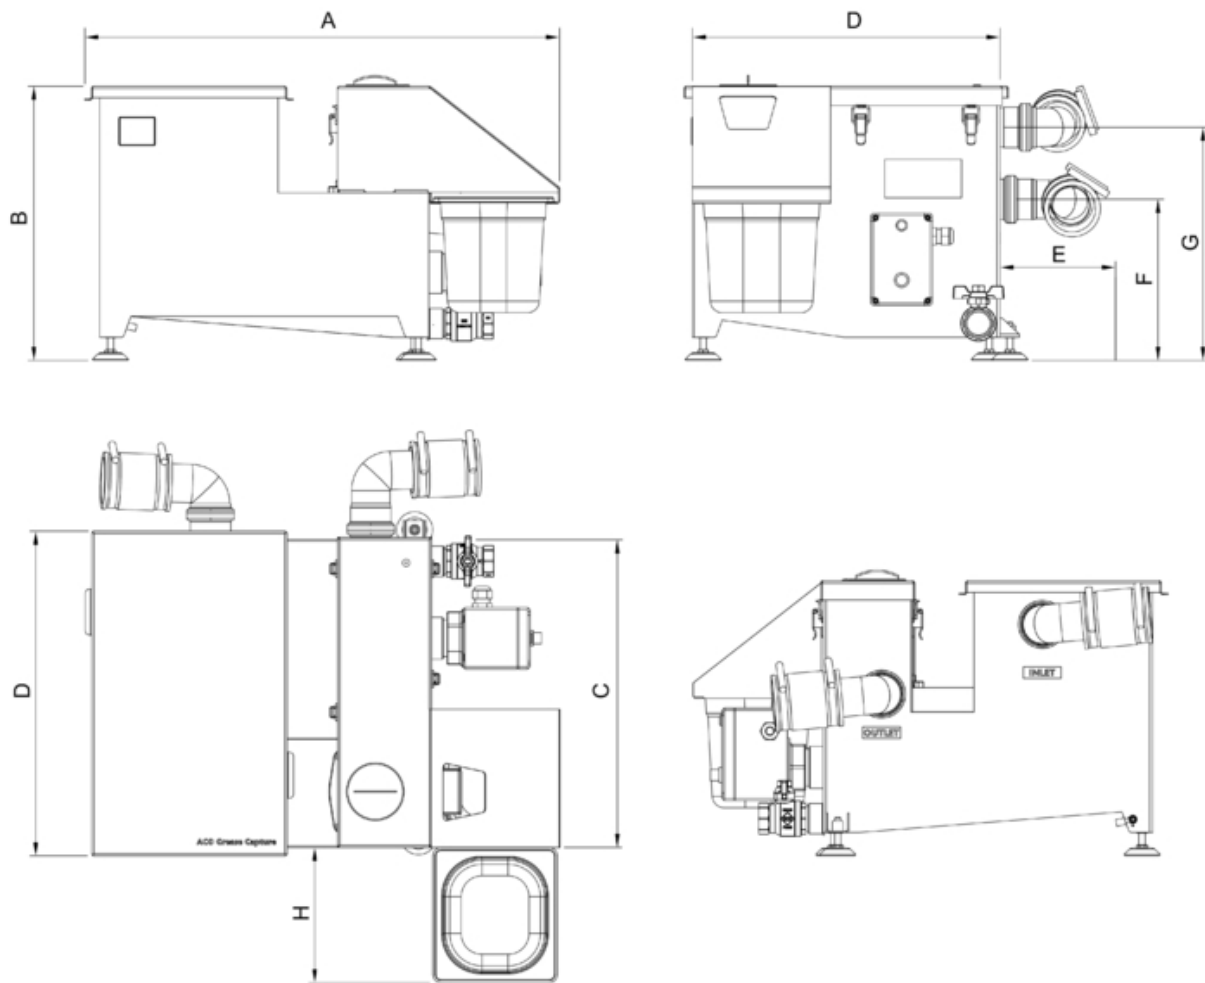

Item number	Description	Dimensions								Shipping dimensions		
		A	B	C	D	E	F	G	H	I	w	h
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
418502.22.23.C2C220		1450	370	460	482	120	229	317	263	370	540	1510