



ACO Below Ground Grease Separators

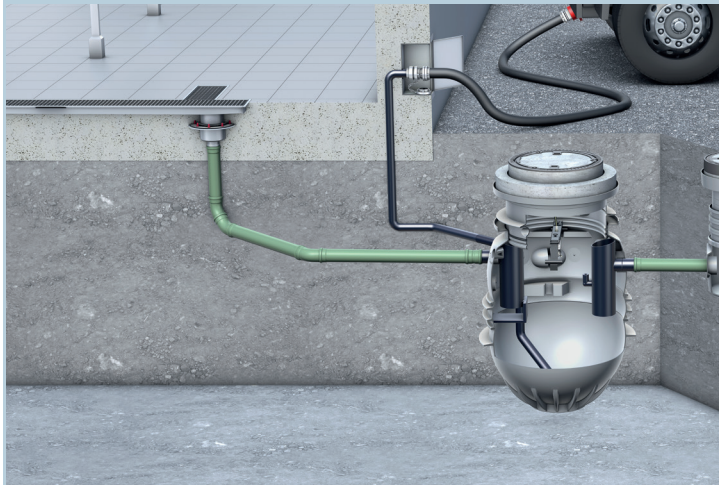

Snap shot of salient features

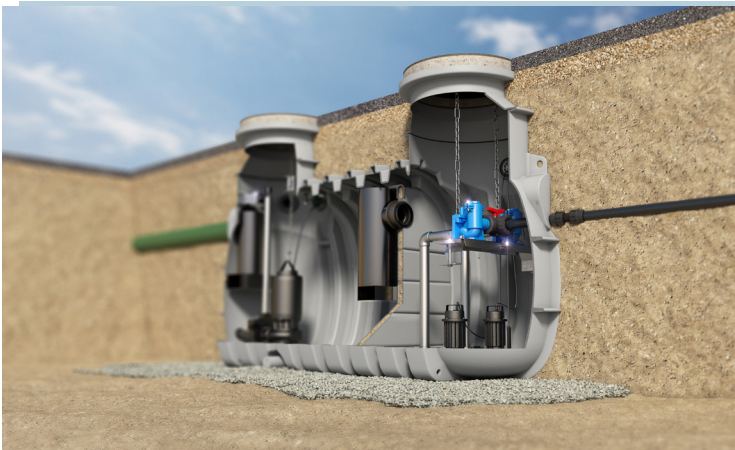

Standard: All ACO Grease separators are manufactured in accordance with EN 1825. All the separators are hydraulically tested and have General Building Supervisory Authority Authorisation and authorisation from DIBt Berlin

Structural stability: Up to 50 years guaranteed

Ease of maintenance: Available in fully automatic version with 175 bar high pressure cleaning system

Water lifting: Available in both detached and integrated lifting station

Disposal: Available with integrated disposal pumps

Shape: Available in both vertical and horizontal tank design

Invert levels: 425mm to 1900mm adjustable

Minimum installation Example: NS-10 1920mm for horizontal tank; 2830mm for depth: vertical tank

Height adjustment: Both integrated and separate top sections for adjustment

Top cover load class: A15, B125 and D400 covers

ACO. creating

the future of drainage